

NEW NEW NEW NEW


TENDONOL®-FDS FLEXIBLE DRY SYSTEM

TENDONOL®-FDS (Flexible Dry System)

Now also tested according to RWS (fire curve over 180 minutes with subsequent cooling phase of 90 minutes)

according to test report MFPA Leipzig PB 3.2/21-120-1

- for quick installation in the tunnel in any weather
- short installation time - seal the joint in **only one** work step - no backfilling necessary
- can be painted over immediately if required
- expansion joints
 - expansion/tension - 100 % (strand Ø 40 mm)
 - elongation/shear - 65 % (strand Ø 40 mm)
- unlimited durability
- sound insulation (56 dB)

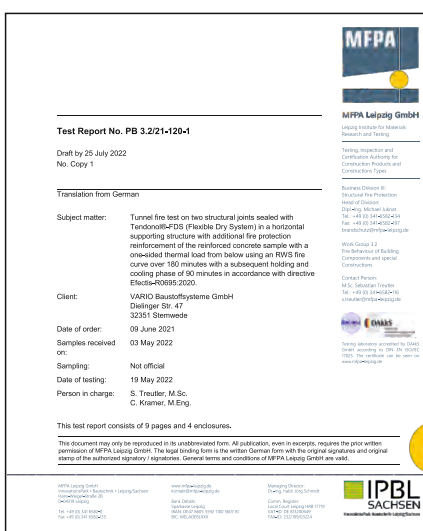

Stemwede 07/2022

This information is based on our current knowledge and experience. They can only be general information without any guarantee of properties, as we have no influence on building site conditions and processing. Due to the wide range of possible influences when using our products, they do not exempt the user from carrying out his own tests or trials.

VARIO-Baustoffsysteme GmbH
D-32351 Stemwede

T +49 5474 91069
F +49 5474 91089

stemwede@vario-brandschutz.de
www.vario-brandschutz.de

